

Date: _____ Account # _____

Account Name: _____

Contact Person: _____

Phone: () _____

Customer Signature: _____

Capacity: _____ Quantity: _____

Hub Face: _____ Spring Center: _____

Axle Type: Beam only Idler Brake Axle

Brake Flange (Beam & Idler)

Bearing Lubrication

Grease Oil E-Z Lube® Nev-R-Lube®

Cambered: Yes No OR Drop Center

Spindle Type:

Straight
4" Drop
6" Drop (3.5K)

Brake Type:

Electric Single Servo Hydraulic
Nev-R-Adjust® Electric Duo Servo Hydraulic
Disc Hydraulic Free Backing Hydraulic

Park:

Wheel Bolt Pattern: 5 on 4.50 5 on 5.50 6 on 5.50
5 on 5.00 5 on 4.75 8 on 6.50

Idler: (2K 5 on 4.50) 5.50" Diameter Hub 6.50" Diameter Hub

Stud Size: 1/2" 9/16" 5/8" Flgd 5/8" Coned/Clamp Ring

Pre-wired: (Standard on Electric Brake Axles) Yes No

Spring Type: Double Eye Slipper

Spring Capacity: _____

Spring Seats: Under Axle Over Axle Loose

Axle Finish: No-Paint Paint Powder Coat

E-Coat Galvanized

Notes: _____

IN CASE OF CUSTOMER ERROR:

Dexter builds axles to order per customer specifications. Please be sure all dimensions and specifications are correct. Axles are subject to a 50% restock fee if returned & the customer is responsible for all freight charges incurred for the original shipment & return. Some combinations may not work pending on options chosen or may not apply.




LEAF SPRING

SUSPENSION AXLES

Straight Axle




Drop Axle

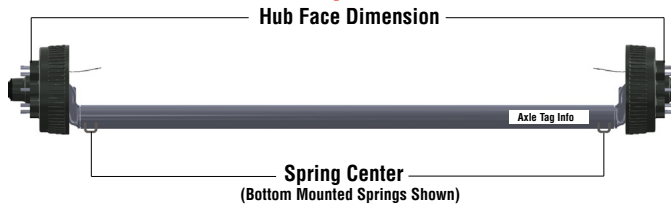

Drop Center Axle



Axle Spacing

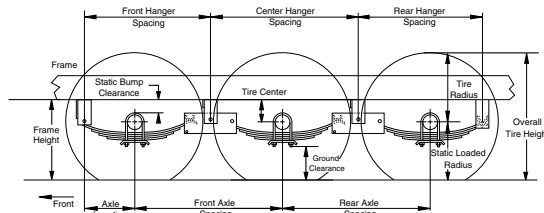

Dexter carries a full line of hanger and attaching parts for mounting your axle.

Albion, IN

Fax: (260)-636-5387 or E-mail:

Elkhart, IN

Fax: (574)-293-7093 or E-mail:

Fremont, IN

Fax: (260)-495-1701 or E-mail:

El Reno, OK

Fax: (405)-262-9089 or E-mail:

Monticello, GA



Fax: (706)-468-2966 or E-mail:

Shawnee, OK


Fax: (405)-273-9979 or E-mail:

LIGHT DUTY
2,000 - 8,000 LBS. CAPACITY


Spring Type

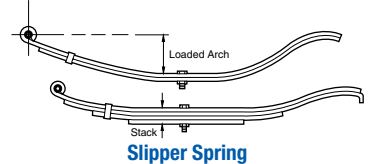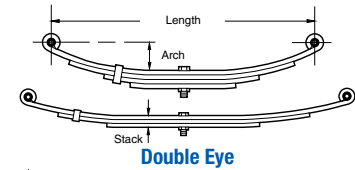


Spring Position

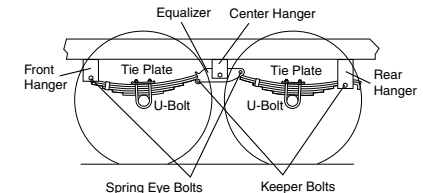

Overlslug Shown

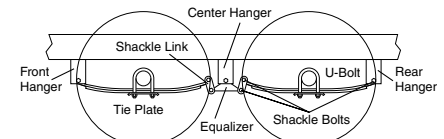

Underslung Shown

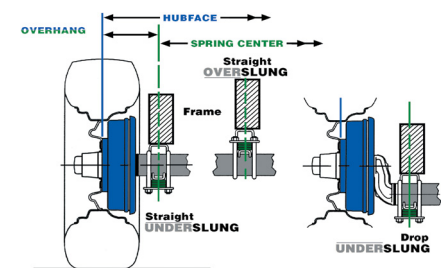

Spindles

