

Date: _____ Account # _____

Account Name: _____

Contact Person: _____

Phone: () _____

Customer Signature: _____

Capacity: _____ Quantity: _____

Hub Face: _____ Track Width: _____ Spring Center: _____

Axle Type: Beam only Idler Brake Axle

Bearing Lubrication:

Grease Oil

Brake Type:

Electric Single-Servo Hydraulic
Disc Hydraulic (10k & 12K) Duo-Servo Hydraulic
(Standard Hyd. Drum)

Park (hydraulic only):

Air Brake (options):

Chambers:

Type 20 (10K-12K) Type 30 (15K) Type 20/24 (10K-12K)

Type 30/30 (15K) No Chambers

Mounted for 20/24 & 30/30

Slacks:

Manual Adjust Automatic Adjust No Slacks

Cam Length:

Standard Length Length: _____

ABS (Air & Hydraulic)

Wheel Bolt Pattern: *8 on 6.50 (9K, 10K & 12K)

*8-275mm (15K)

Whee Nuts: 5/8" Flgd 5/8" Coned/Clamp Ring (standard)

Pre-wired: Yes No (standard)

Spring Seats: Under Axle Over Axle Loose NONE

Spring Type: Slipper HDSS Suspension No Springs

Spring Capacity: _____

Adjustable Suspension: Yes No

Painted: Yes No

Notes: _____

IN CASE OF CUSTOMER ERROR:


Dexter builds axles to order per customer specifications. Please be sure all dimensions and specifications are correct. Axles are subject to a 50% restock fee if returned & the customer is responsible for all freight charges incurred for the original shipment & return. Some combinations may not work pending on options chosen or may not apply.




LEAF SPRING

SUSPENSION AXLES

Straight Axle

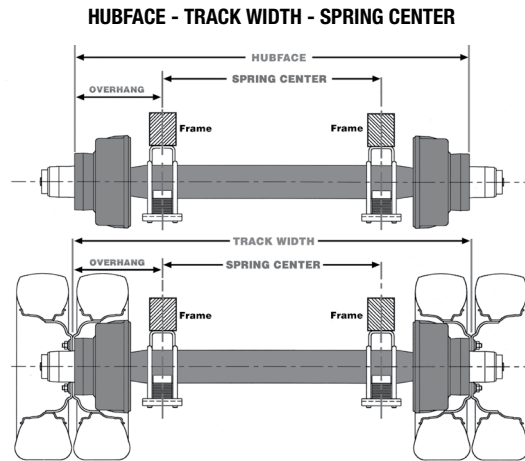


Spring Position

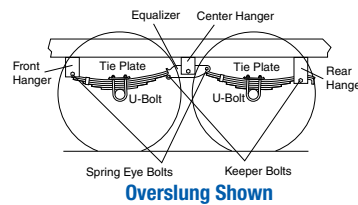


Overslung Shown

Spring Type

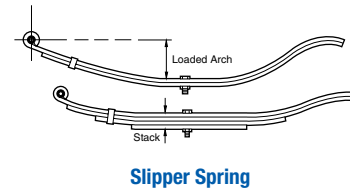

Slipper Spring

Axle Spacing

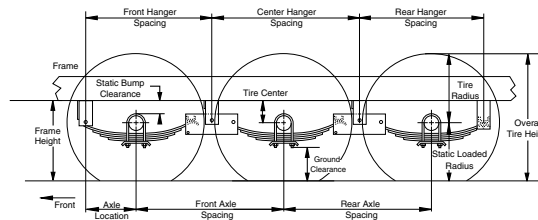

Dexter carries a full line of hanger and attaching parts for mounting your axle.

Albion, IN

Fax: (260)-636-5387 or E-mail:

Elkhart, IN

Fax: (574)-293-7093 or E-mail:

Fremont, IN

Fax: (260)-495-1701 or E-mail:

El Reno, OK

Fax: (405)-262-9089 or E-mail:

Monticello, GA

Fax: (706)-468-2966 or E-mail:

Shawnee, OK

Fax: (405)-273-9979 or E-mail:

MEDIUM DUTY
9,000 - 15,000 LBS. CAPACITY

Wheel Offset

